

# T-MAX<sup>®</sup> BOARD (MODEL NAME: T-BOARD)



T-MAX<sup>®</sup> Board



Hueintek, Inc. has been committed to focusing on saving energy and a clean environment since 2003. They are ISO 9001, ISO 14001 and Greengard Gold certified with continual improvement programs in place to reduce the environmental impact.

With the aim of “Environment Innovation”, Hueintek, Inc. launched T-MAX<sup>®</sup> sound absorption and insulation made from 100% recyclable polyesters which are designed to reduce noise and reverberated sound. The primary material of T-MAX<sup>®</sup> is 60~90% recycled polyester fibers.

T-MAX<sup>®</sup> is the high-quality and high-performance choice; durable yet flexible, easy to cut, easy to install, and lightweight.

More information is at <http://www.ecotmax.com>



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO21930:2017

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	UL Environment 333 Pfingsten Road Northbrook, IL 60611	<a href="https://www.ul.com/">https://www.ul.com/</a> <a href="https://spot.ul.com/">https://spot.ul.com/</a>
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions v.2.5 March 2020	
MANUFACTURER NAME AND ADDRESS	Hueintek Inc., 25-3, Hyundaikia-ro, Paltan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea	
DECLARATION NUMBER	4789406799.101.1	
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	T-MAX(model name: T-BOARD): 1m <sup>2</sup>	
REFERENCE PCR AND VERSION NUMBER	Part B: Mechanical, Specialty, Thermal, and Acoustic Insulation Product EPD Requirements, UL 10010-03, version 1.0	
DESCRIPTION OF PRODUCT APPLICATION/USE	T-MAX is a type of Interior Finishes used in a variety of building applications, both residential and commercial.	
PRODUCT RSL DESCRIPTION (IF APPL.)	75 years	
MARKETS OF APPLICABILITY	North America	
DATE OF ISSUE	January 15, 2021	
PERIOD OF VALIDITY	5 years	
EPD TYPE	Product-specific	
RANGE OF DATASET VARIABILITY	N/A	
EPD SCOPE	Cradle to grave with options (A1-3, A4 A5, C1, C2, C3, C4)	
YEAR(S) OF REPORTED PRIMARY DATA	2019	
LCA SOFTWARE & VERSION NUMBER	GaBi 8.5.0.79	
LCI DATABASE(S) & VERSION NUMBER	GaBi Database 8007	
LCIA METHODOLOGY & VERSION NUMBER	TRACI 2.1 v1.05; CML-IA version 4.2	

The PCR review was conducted by:

PCR Review Panel

This declaration was independently verified in accordance with ISO 14025: 2006.

INTERNAL

EXTERNAL

Jessica Kwon, UL Environment

This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:

Thomal Gloria, Industrial Ecology Consultants

## LIMITATIONS

**Exclusions:** EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

**Accuracy of Results:** EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

**Comparability:** EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 1. Product Definition and Information

### 1.1. Description of Company/Organization

Founded in 2003, Hueintek is an environmentally friendly company which produces 100% pure polyester acoustic sound absorption and insulation. By manufacturing great quality of polyester acoustic sound absorption and insulation, Hueintek has grown the business worldwide providing support to meet consumers in the respective markets. The product covered by this Environmental Product Declaration (EPD) was produced in the following location:

- Manufacturing plant: Hueintek Inc., Hwaseong works..
- Location: 25-3, Hyundaikia-ro, Paltan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

### 1.2. Product Description

#### Product Identification

T-MAX products are made from 100% polyester fiber, bonded using heat instead of chemical binders. Polyester is naturally resistant to moisture, insects and mold. And, it is highly durable, and easy to work with lightweight.

#### Product Specification

For the declared product, the following technical data in the delivery status must be provided with reference to the test standards:

Table 1. Technical Specifications

PROPERTY	TEST METHOD	VALUE
Fire hazard classification	ASTM E84	Available in Class A
Noise reduction coefficient	ASTM C423 Mounting A	NRC 0.70 SAA 0.69
Fungi resistance of insulation materials and facings	ASTM C1338-08	Pass
Classification of reaction to fire	BS EN 13823:2010	Reaction to fire classification B-s1,d0
	BS EN ISO 11925-2:2010	

#### Product Average

The results of this declaration represent an average performance for the listed products and manufacturing locations. The average product is calculated based on the weight of production.



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 1.3. Application

T-MAX products are used on interior ceilings and walls to provide outstanding insulation and sound absorption.



Figure1. T-MAX in its various application

## 1.4. Declaration of Methodological Framework

This declaration is a product-specific EPD and is cradle-to-installation with end-of-life. The underlying LCA upon which this EPD is based included the following life cycle modules: Raw Material supply (A1); Inbound Transportation (A2); Manufacturing (A3); Distribution (A4); Installation (A5); End-of-life, Deconstruction (C1); Transport (C2); Waste processing (C3) and End-of-life, Disposal (C4). No known flows have been deliberately excluded. The product is expected to perform as claimed for the 75-year reference service life if it remains clean and dry in its installed state.

## 1.5. Technical Requirements

The standards that can be applied for T-MAX are:

- ASTM E84 - Surface Burning Characteristics; pursuant to test certificate
- ASTM C423 - Sound Absorption
- ASTM C1338-08 – Fungi Resistance of Insulation Materials and Facings
- BS EN 13823:2010 / BS EN ISO 11925-2:2010 Reaction to fire classification B-s1,d0

## 1.6. Properties of Declared Product as Delivered

The declared product dimensions vary by installation. The range of products declared in the table below has a density of 80 to 120 kg/m<sup>3</sup>, a thickness of 25 mm to 50 mm. Since the ranges are declared, variations may occur for specific products.

# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
 Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
 EN 15804 and ISO 21930:2017

**Table 2. Declared Unit Properties of T-MAX (model name: T-BOARD)**

NAME	VALUE	UNIT
Declared unit	1	m <sup>2</sup>
Density	80 - 120	kg/m <sup>3</sup>
Thickness	25 - 50	mm

## 1.7. Material Composition

The composition of the T-MAX(1m<sup>2</sup>) is as follows:

**Table 3. Material Composition (model name: T-BOARD)**

MATERIAL COMPONENT	QUANTITY (% BY MASS)
polyester staple fiber	10 ~ 40
Recycled polyester fiber	60 ~ 90
other	<1

## 1.8. Manufacturing

### Manufacturing Locations

- Manufacturing plant: Hueintek Inc., Hwaseong works.
- Location: 25-3, Hyundaikia-ro, Paltan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

### Manufacturing Process

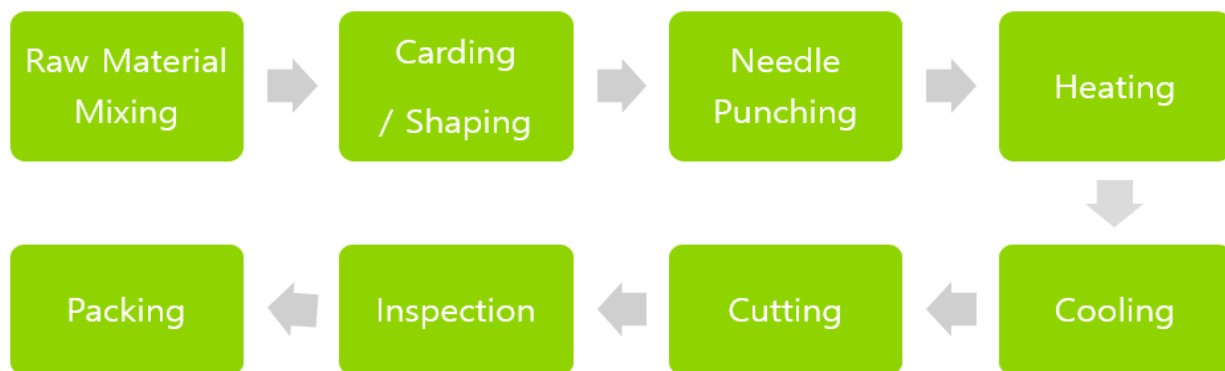


Figure2. T-MAX Manufacturing Process



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 1.9. Packaging

T-MAX products are packaged using LDPE (low-density polyethylene) film in the form of bag or plastic film. The regional disposal scenarios for the U.S. is the default assumption for the packaging waste generated during installation. The disposal rates by material type and waste treatment method are shown in the table below.

Table 4. Disposal rates used by material type and waste treatment method

COUNTRY/REGION	MATERIAL TYPE	RECYCLING RATE	LANDFILL RATE	INCINERATION RATE
United States	Plastics	15%	68%	17%
	Metals	57%	34%	9%
	Pulp(cardboard, paper)	75%	20%	5%

## 1.10. Transportation

The outbound transportation of the product from the manufacturing facility is diesel-truck and ship. The weighted average distance from the manufacturing site to the customer is 463 km by truck and 11,010 km by ship.

## 1.11. Product Installation

T-MAX products are made for easy handling and installation. Installation of Hueintek's T-MAX products is accomplished by manual labor using mostly hand tools. No material or energy inputs are required on the jobsite.

## 1.12. Use

There are no special features to be noted within the limits of normal and customary usage.

## 1.13. Reference Service Life and Estimated Building Service Life

The product is assumed to remain in service for the life of the building, 75 years.

## 1.14. Reuse, Recycling, and Energy Recovery

At end-of-life, the products may be recycled or disposed of in a landfill.

## 1.15. Disposal

Until a formal recycling program gets completed, It was assumed that all materials removed from the decommissioning of a building were taken to a local construction waste landfill, using 100 miles as the average distance to landfill. Disposal in municipal landfill or commercial incineration facilities is permissible and should be done in accordance with local, state, and federal regulations.



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
 Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
 EN 15804 and ISO 21930:2017

## 2. Life Cycle Assessment Background Information

### 2.1. Functional or Declared Unit

The declared unit for this EPD is 1 m<sup>2</sup> of T-MAX product for use over 75 years.

Table 5. The declared unit of the T-MAX (model name: T-BOARD)

NAME	VALUE	UNIT
Declared unit	1	m <sup>2</sup>
Declared thickness	25 to 50	mm
Weight per declared unit	3.09	kg/m <sup>2</sup>

### 2.2. System Boundary

This EPD is cradle-to-installation with end-of-life. Details of the system boundaries may be found in the table below.

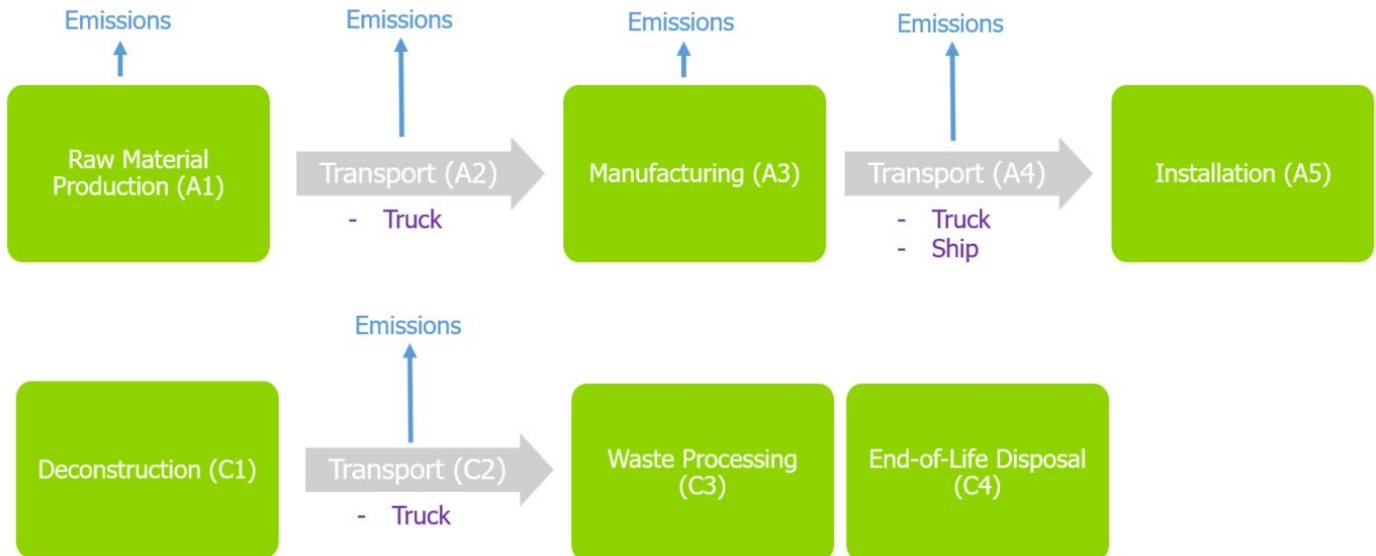


Figure3. T-MAX System boundary

# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
 Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
 EN 15804 and ISO 21930:2017

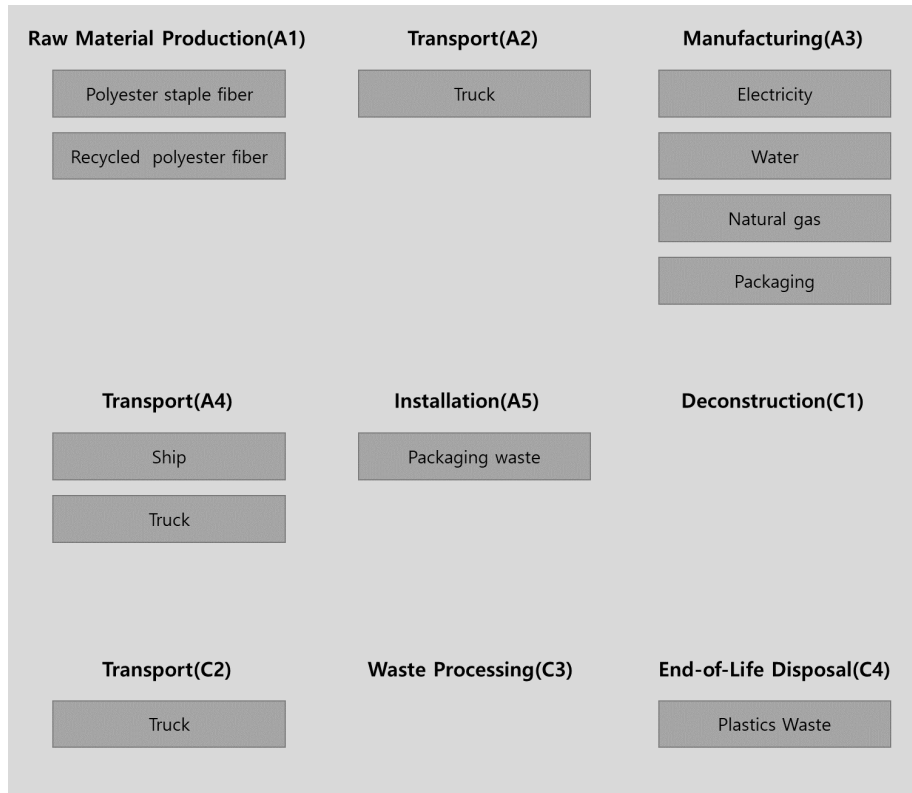


Figure4. Flow Diagram of T-MAX

## 2.3. Estimates and Assumptions

T-MAX is a requiring no utilities or maintenance over its useful life; it is assumed that the product remains in service for the 75-year reference service.

## 2.4. Cut-off Criteria

According to the section 2.9 of PCR(UL 10010 Version 3.2), the procedure detailed in ISO 21930, section 7.1.8 was followed regarding the exclusion of inputs and outputs. For energy, mass and environmental impacts, the cut-off criteria were 1% per the standard. Per the standard "the total of neglected input flows per module shall be a maximum of 5% of energy usage, mass and environmental impacts."

Flows excluded for this study include infrastructure, capital goods and workforce burdens. Inputs and outputs associated with infrastructure (construction, maintenance and demolition of buildings/plants, road surfaces, transport equipment, etc.) are not included. This choice is based on experience from previous LCAs where the contribution from these items was negligible due to the long lifetime of the equipment compared to the high production volume of material during that lifetime. Although pallets are used in the transportation of packaged, finished T-MAX products, pallets have been excluded due to their high reuse rates since they would have a negligible impact if otherwise included.





# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 2.5. Data Sources

---

Primary manufacturing data was collected from the included manufacturing locations listed in the Manufacturing section. Secondary data primarily references the GaBi database. LCI data was taken from the GaBi databases which are on the approved database list in the PCR.

## 2.6. Data Quality

---

Primary data was based on measured and calculated data from the Hueintek plant which produced most of the product in calendar year 2019. It meets requirements for completeness along with temporal, geographical and technological representativeness.

## 2.7. Period under Review

---

The LCA data were collected for the calendar year 2019.

## 2.8. Allocation

---

Where it was not possible to avoid allocation, allocation was made based on product mass which is suggested by the PCR. The raw material, energy and waste data were collected and allocated based on the mass of the entire plant consumption because the products produced in the factory have different specifications (height, width, thickness, density), but are produced through the same process.

# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 3. Life Cycle Assessment Scenarios

**Table 6. Transport to the building site (A4)**

NAME	VALUE	UNIT
Fuel type	diesel, low-sulfur	
Liters of fuel	2.95E-03 [4.00E-01]	l/100km
Vehicle type	EURO3, 26-28 metric ton lorry [Container ship, 27500dwt]	
Transport distance	4.63E+02 [1.10E+04]	km
Capacity utilization (including empty runs, mass based)	85	%
Gross density of products transported	1.09E+02	kg/m <sup>3</sup>
Weight of products transported (if gross density not reported)	3.09E+00	kg
Volume of products transported (if gross density not reported)	2.83E-02	m <sup>3</sup>
Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products)	1	-

**Table 7. Installation into the building (A5)**

NAME	VALUE	UNIT
Ancillary materials	0.00E+00	kg
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	0.00E+00	m <sup>3</sup>
Other resources	0.00E+00	kg
Electricity consumption	0.00E+00	kWh
Other energy carriers	0.00E+00	MJ
Product loss per functional unit	0.00E+00	kg
Waste materials at the construction site before waste processing, generated by product installation	0.00E+00	kg
Output materials resulting from on-site waste processing (specified by route; e.g. for recycling, energy recovery and/or disposal)	0.00E+00	kg
Biogenic carbon contained in packaging	1.73E-01	kg CO <sub>2</sub>
Direct emissions to ambient air, soil and water	0.00E+00	kg
VOC content	0.00E+00	µg/m <sup>3</sup>
	0.00E+00	

# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 8. End of life (C1-C4)**

NAME		VALUE	UNIT
Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation)			
Collection process (specified by type)	Collected separately	0.00E+00	kg
	Collected with mixed construction waste	3.09E+00	kg
Recovery (specified by type)	Reuse	0.00E+00	kg
	Recycling	0.00E+00	kg
	Landfill	0.00E+00	kg
	Incineration	0.00E+00	kg
	Incineration with energy recovery	0.00E+00	kg
	Energy conversion efficiency rate	0.00E+00	
Disposal (specified by type)	Product or material for final deposition	3.09E+00	kg
Removals of biogenic carbon (excluding packaging)		0.00E+00	kg CO <sub>2</sub>

## 4. Life Cycle Assessment Results

**Table 9. Description of the system boundary modules**

EPD Type	PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE						END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY	
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
	Raw material supply	Transport	Manufacturing	Transport from gate to site	Assembly/Install	Use	Maintenance	Repair	Replacement	Refurbishment	Building Operational Energy Use During Product Use	Building Operational Water Use During Product Use	Deconstruction	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling Potential
	X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	MND

MND: module not declared X: declared



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 4.1. Life Cycle Impact Assessment Results

The following results were obtained as a result of the life cycle impact assessment(LCIA) for the T-MAX. The LCIA results are shown through the TRACI 2.1 and CML guideline 2001 (2016).

The LCIA results are relative expressions and do not predict impacts on category endpoints, the exceedance of thresholds, safety margins or risks.

**Table 10. North American Impact Assessment Results for 1 m<sup>2</sup> T-MAX (model name: T-BOARD)**

TRACI v2.1	A1-A3	A4	A5	C1	C2	C3	C4
GWP 100 [kg CO <sub>2</sub> eq]	9.16.E+00	6.04.E-01	9.20.E-02	0.00.E+00	6.00.E-02	0.00.E+00	1.58.E-02
ODP [kg CFC-11 eq]	4.72.E-12	1.49.E-14	1.39.E-14	0.00.E+00	2.50.E-15	0.00.E+00	3.61.E-15
AP [kg SO <sub>2</sub> eq]	1.63.E-02	1.67.E-02	1.40.E-04	0.00.E+00	3.39.E-04	0.00.E+00	1.03.E-04
EP [kg N eq]	1.42.E-03	5.79.E-04	3.70.E-05	0.00.E+00	2.77.E-05	0.00.E+00	8.70.E-06
POCP [kg O <sub>3</sub> eq]	2.44.E-01	3.11.E-01	1.24.E-03	0.00.E+00	7.54.E-03	0.00.E+00	2.03.E-03
ADP <sub>fossil</sub> [MJ, LHV]	2.35.E+01	1.07.E+00	2.99.E-02	0.00.E+00	1.17.E-01	0.00.E+00	2.57.E-02

[GWP – Global Warming Potential, ODP – Ozone Depletion Potential, AP – Acidification Potential, EP – Eutrophication Potential, POCP – Smog Formation Potential, ADP<sub>fossil</sub> – Abiotic Depletion Potential of Non-renewable (fossil) energy resources]

**Table 11. EU Impact Assessment Results for 1 m<sup>2</sup> T-MAX (model name: T-BOARD)**

CML v4.2	A1-A3	A4	A5	C1	C2	C3	C4
GWP 100 [kg CO <sub>2</sub> eq]	9.18.E+00	6.05.E-01	9.22.E-02	0.00.E+00	5.98E-02	0.00.E+00	1.60.E+02
ODP [kg CFC-11 eq]	4.72.E-12	1.49.E-14	1.39.E-14	0.00.E+00	2.50.E-15	0.00.E+00	3.61.E-15
AP [kg SO <sub>2</sub> eq]	1.54.E-02	1.58.E-02	1.25.E-04	0.00.E+00	2.51.E-04	0.00.E+00	9.42.E-05
EP [kg PO <sub>4</sub> <sup>-3</sup> eq]	2.48.E-03	1.67.E-03	3.91.E-05	0.00.E+00	6.37.E-05	0.00.E+00	1.30.E-05
POCP [kg ethene eq]	1.89.E-03	6.90.E-04	3.65.E-05	0.00.E+00	9.32.E-05	0.00.E+00	7.32.E-06
ADP <sub>element</sub> [kg Sb-eq]	1.83.E-06	2.15.E-08	8.03.E-09	0.00.E+00	5.38.E-09	0.00.E+00	6.00.E-09
ADP <sub>fossil</sub> [MJ, LHV]	1.77.E+02	7.48.E+00	2.81.E-01	0.00.E+00	8.19.E-01	0.00.E+00	2.06.E-01

[GWP – Global Warming Potential, ODP – Depletion potential of the stratospheric ozone layer, AP – Acidification Potential of soil and water, EP – Eutrophication Potential, POCP – Photochemical Oxidant Creation Potential, ADP<sub>element</sub> – Abiotic depletion potential (ADP-Elements) for non-fossil resources, ADP<sub>fossil</sub> – Abiotic Depletion Potential (ADP-fossil fuels) for fossil resources]



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 4.2. Life Cycle Inventory Results

**Table 12. Resource Use for 1 m<sup>2</sup> T-MAX (model name: T-BOARD)**

PARAMETER	A1-A3	A4	A5	C1	C2	C3	C4
RPR <sub>E</sub> [MJ, LHV]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
RPR <sub>M</sub> [MJ, LHV]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
NRPR <sub>E</sub> [MJ, LHV]	7.03E-01	1.79E-01	8.37E-03	0.00.E+00	1.99E-02	0.00.E+00	5.74E-03
NRPR <sub>M</sub> [MJ, LHV]	5.40E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
SM [kg]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
RSF [MJ, LHV]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
NRSF [MJ, LHV]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
RE [MJ, LHV]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
FW [m <sup>3</sup> ]	5.05E+00	2.41E-02	9.34E-03	0.00.E+00	4.46E-03	0.00.E+00	1.61E-02

**Table 13. Output Flows and Waste Categories for 1 m<sup>2</sup> T-MAX (model name: T-BOARD)**

PARAMETER	A1-A3	A4	A5	C1	C2	C3	C4
HWD [kg]	1.27E-07	4.34E-08	6.63E-08	0.00.E+00	4.34E-08	0.00.E+00	3.67E-09
NHWD [kg]	6.48E+00	2.04E-02	1.55E-01	0.00.E+00	4.14E-03	0.00.E+00	1.04E+00
HLRW [kg] or [m <sup>3</sup> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
ILLRW [kg] or [m <sup>3</sup> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
CRU [kg]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
R [kg]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
MER [kg]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
EE [MJ, LHV]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00

**Table 14. Carbon Emissions and Removals for 1 m<sup>2</sup> T-MAX (model name: T-BOARD)**

PARAMETER	A1-A3	A4	A5	C1	C2	C3	C4
BCRP [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
BCEP [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
BCRK [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
BCEK [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
BCEW [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
CCE [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
CCR [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00
CWNR [kg CO <sub>2</sub> ]	0.00E+00	0.00E+00	0.00E+00	0.00.E+00	0.00E+00	0.00.E+00	0.00E+00



# ENVIRONMENTAL PRODUCT DECLARATION




**T-MAX® Board (Model name: T-BOARD)**  
 Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
 EN 15804 and ISO 21930:2017

## 5. LCA Interpretation

The underlying LCA upon which this EPD is based considered the following six environmental impact categories: Global Warming Potential (GWP 100); Ozone Depletion Potential (ODP); Acidification Potential (AP); Eutrophication Potential (EP); Smog Formation Potential (POCP); and Abiotic Resource Depletion Potential of Non-renewable (fossil) energy resources (ADP fossil).

The impact assessment results indicate that among the life cycle modules declared for T-MAX board, the Raw material supply (A1) life cycle module accounted for the majority of the potential environmental impact of each of these six impact categories.

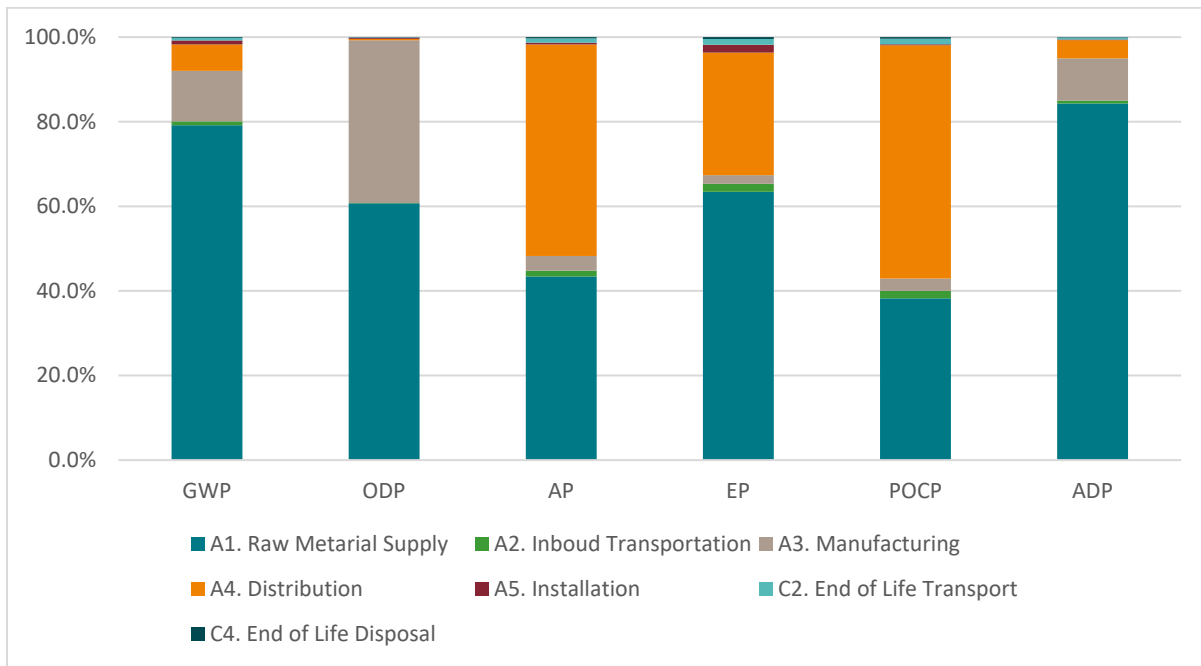

## 6. Additional Environmental Information

### 6.1. Environment and Health During Installation

Classified as Non-Hazardous according to OSHA29CFR1910.1200.

### 6.2. Extraordinary Effects

No extraordinary effects or environmental impacts are expected due to destruction of the product by fire, water or mechanical means



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 6.3. Delayed Emissions

---

No delayed emissions are expected from this product.

## 6.4. Environmental Activities and Certifications

---

- GREENGUARD Gold: The products are certified by GREENGUARD standards for low chemical emissions in indoor air during product usage.
- Korea Eco-label: The products are certified as eco-friendly lagging insulation materials for use of recycled materials, energy saving, sound-absorbing.
- Healthy building material: The products are certified as eco-friendly building materials according to released intensity of organic compounds (TVOC, HCHO). Korea Air Cleaning Association (KACA) certifies HB mark and qualifies certification grades through rigorous and thorough certification test on the ground of Green Building Assessment System.

## 6.5. Further Information

---

Additional information may be found at <http://www.ecotmax.com>



# ENVIRONMENTAL PRODUCT DECLARATION



**T-MAX® Board (Model name: T-BOARD)**  
Sound Block, Sound Absorption & Thermal Insulation

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 7. References

---

PCR A: Life Cycle Assessment Calculation Rules and Report Requirements UL Environment (December 12, 2018, version 3.2)

PCR Part B: Mechanical, Specialty, Thermal and Acoustic Insulation EPD Requirements, UL Environment, UL 10010-03 (September 3, 2019, version 1.0)

ISO 14025: 2006, Environmental labels and declarations — Type III environmental declarations — Principles and procedures

ISO 14040: 2006, Environmental management – Life cycle assessment – Principles and framework

ISO 14044:2006, Environmental management – Life cycle assessment – Requirements and guidelines

ISO 14046:2013, Environmental management- Water footprint- Principles, requirements and guidelines

EN 15804:2012+A1:2013, Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products

ISO 21930: 2017, Sustainability in building construction -- Environmental declaration of building products

EN 15804, Sustainability of construction works, Environmental product declarations, Core rules for the product category of construction products

ASTM C423, Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

ASTM E84, Standard Test Method for Surface Burning Characteristics of Building Materials

UL General Program Rules v. 2.5 March 2020